

09/28/00

09/28/00

+

A

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 35.C14841

First Named Inventor or Application Identifier

HARUO MACHIDA

Express Mail Label No.

Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☐ Applicant claims small entity status.
See 37 CFR 1.273. ☒ Specification **Total Pages** **48**4. ☒ Drawing(s) (35 USC 113) **Total Sheets** **17**5. ☐ Oath or Declaration **Total Pages** a. ☐ Newly executed (original or copy)b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 6 below]c. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting
inventor(s) named in the prior application, see
37 CFR 1.63(d)(2) and 1.33(b).6. ☒ Application Data Sheet. See 37 CFR 1.767. ☐ CD-ROM or CD-R in duplicate, large table or Computer
Program (Appendix)8. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Form (CRF)

b. Specification Sequence Listing on:

i. ☐ CD-ROM or CD-R (2 copies), orii. ☐ paperc. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)11. ☐ English Translation Document (if applicable)12. ☐ Information Disclosure ☐ Copies of IDS
Statement (IDS)/PTO-1449 Citations13. ☐ Preliminary Amendment14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)
Prior application information: Examiner _____of prior application No. _____
Group/Art Unit: _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

05514

☒ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS (37 CFR 1.16(c))		21-20 =	1	X \$ 18.00 =	\$ 18.00
INDEPENDENT CLAIMS (37 CFR 1.16(b))		3-3 =	0	X \$ 78.00 =	\$ 0.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))				\$260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00
Total of above Calculations =					\$ 708.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28)					
TOTAL =					\$ 708.00

19. Small entity status


- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 708.00 to cover the filing fee is enclosed

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	Scott D. Malpede - Reg. No. 32,533
SIGNATURE	
DATE	September 28, 2000

INVENTOR INFORMATION

Inventor One Given Name: Haruo
Family Name: MACHIDA
Postal Address Line One: 15-12, Nakazawa 2-chome, Asahi-ku
City of Residence: Yokohama-shi
State or Province of Residence: Kanagawa-ken
Country of Residence: Japan
Citizenship Country: Japan

CORRESPONDENCE INFORMATION

Correspondence Customer Number: 05514
Fax: (212) 218-2200

APPLICATION INFORMATION

Title Line One: DISPLAY METHOD IN NETWORK APPARATUS

Total Drawing Sheets: 17
Formal Drawings?: Yes
Application Type: Utility
Docket Number: 35.C14841
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Representative Customer Number: 5514

PRIOR FOREIGN APPLICATIONS

Foreign Application One: 11-281969
Filing Date: 10-01-1999
Country: JAPAN
Priority Claimed: Yes

Foreign Application Two: 11-283094
Filing Date: 10-04-1999
Country: JAPAN
Priority Claimed: Yes

Priority Claimed: Yes

[illegible]

DISPLAY METHOD IN NETWORK APPARATUS

BACKGROUND OF THE INVENTION

Field of the Invention

5 The invention relates to a network apparatus and, more particularly, to a technique for displaying a connecting state of network apparatuses which are connected onto a network.

Related Background Art

10 In recent years, personal computers (hereinafter, referred to as PCs) and their peripherals have been spread and a network such as a local area network (hereinafter, referred to as an LAN) or the like has also been spread. There are a printer, a scanner, a
15 digital camera, and the like as peripherals mentioned above.

 Needs for sharing a printer, a modem, or a scanner on the network have also been increased. By sharing the peripherals such as printer, scanner, and the like
20 on the network, an environment such that every apparatus on the network can be used is obtained.

 There is, however, not a technique such that all of PCs and their peripherals which can be used are efficiently displayed on the same screen, which
25 apparatus is connected to the network can be displayed, or an installing state or a processing state of each driver can be displayed.

It is an object of the invention to provide a display technique of network apparatuses, in which a connecting state of the network apparatus which is connected to a network can be efficiently displayed.

5

SUMMARY OF THE INVENTION

The invention is made in consideration of the above problems.

According to one aspect of the invention, there is
10 provided an information processing apparatus which can communicate through a network with each of a plurality of information processing apparatuses connected to the network, wherein the apparatus has a function for displaying a virtual system display screen for
15 graphically displaying connecting states of the plurality of information processing apparatuses and peripherals locally connected to each information processing apparatus.

In response to a user action for an icon of the
20 information processing apparatus on the virtual system display screen, an icon showing the peripheral locally connected to the information processing apparatus corresponding to the icon as a target of the action is displayed, and the display positions of the icons which
25 have already been displayed on the virtual system display screen are calculated on the basis of display spaces of peripheral icons which are newly displayed on

the virtual system display screen.

According to the invention constructed as mentioned above, by calculating the positions where the network apparatuses connected to the network and/or the peripherals connected to the network apparatuses are displayed on the display screen, the network apparatuses and/or the peripherals can be efficiently displayed.

The above and other objects and features of the present invention will become apparent from the following detailed description and the appended claims with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a network construction according to the invention;

Fig. 2 is a block diagram showing a specific construction of network apparatuses and peripherals in Fig. 1;

Fig. 3, composed of Figs. 3A and 3B, is a flowchart showing processes of the network apparatus according to the first embodiment;

Figs. 4, 5, 6, 7 and 8 are diagrams showing device map display screens of the first embodiment;

Fig. 9 is a flowchart showing a reduced display process according to the embodiment;

Fig. 10 is a flowchart showing processes of a

network apparatus according to the second embodiment;

Figs. 11, 12 and 13 are diagrams showing device
map display screens of the second embodiment;

Fig. 14 is a flowchart showing processes of a
5 network apparatus according to the third embodiment;
and

Figs. 15 and 16 are diagrams showing examples of a
structure of a data table which is stored in the
network apparatus according to the third embodiment.

10

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the invention will now be described
hereinbelow with reference to the drawings.

Fig. 1 is a block diagram showing a network
15 construction according to an embodiment of the
invention.

A communication network 21 is a communication
network such as Ethernet or the like. A plurality of
network apparatuses 22 are connected to the
20 communication network 21. The network apparatuses 22
are, for example, PCs.

A peripheral 23 can be connected to each network
apparatus 22. The peripheral 23 is, for example, a
printer, an image scanner, and/or a digital camera, or
25 the like. It is not always necessary that the
peripheral 23 is connected to the network apparatus 22
but a plurality of peripherals 23 can be also connected

to one network apparatus 22.

Fig. 2 is a block diagram showing a specific construction of the network apparatuses 22 and peripherals 23 according to the embodiment.

5 A printer 18 and a scanner 1B correspond to the peripherals 23 (Fig. 1). The other constructing blocks correspond to the network apparatuses 22 (Fig. 1). The network apparatuses 22 are, for example, PCs.

10 Reference numeral 1 denotes a system bus. Each constructing block, which will be explained hereinbelow is connected to the system bus 1. Reference numeral 2 denotes a CPU (Central Processing Unit).

15 Reference numeral 3 denotes a program memory (referred to as a PMEM). Operating programs for various processes are properly selected/read out from a hard disk 10 and stored in the PMEM 3. The CPU 2 executes the operating programs stored in the PMEM 3.

20 Data inputted from a keyboard 12 is stored as code information into the PMEM 3 also serving as a text memory. Reference numeral 4 denotes a communication controller for controlling input/output data at a communication port 5.

25 A signal outputted from the communication port 5 is transmitted to a communication port of another network apparatus 7 on the network via a communication line 6 (communication network 21 in Fig. 1). The network apparatus 22 (Fig. 1) can input/output

(transmit/receive) a signal to/from a printer or a scanner shared on the network by the communication controller 4.

Although the embodiment will be described with respect to a network such as an LAN or the like, the embodiment can be also applied to a case where the communication port 5 and communication line 6 which are connected to the communication controller 4 are general public lines.

Reference numeral 8 denotes a storage controller and 9 and 10 indicate disks for data files. For example, reference numeral 9 denotes a floppy disk and 10 indicates a hard disk.

Reference numeral 11 denotes an input controller. Input apparatuses such as keyboard 12, mouse 13, and the like are connected to the input controller 11. The operator issues an operation instruction or the like of the network apparatus by operating the keyboard 11.

The mouse 13 can be also allowed to function as a pointing device for instructing a modification of image information on a CRT (display apparatus) 16. Another pointing device can be also used in place of the mouse 13.

The mouse 13 can arbitrarily move a cursor on the CRT 16 in the X direction and Y direction, select a command icon on a command menu, and instruct a process. The mouse 13 can also instruct an edition target, a

drawing position, and the like.

Reference numeral 14 denotes a video image memory (hereinafter, referred to as a VRAM); 15 a display controller; and 16 the CRT. Characters or an image which is displayed on the CRT 16 has been developed as bit map data in the VRAM 14.

Reference numeral 17 denotes a printer controller. The printer controller 17 performs an output control of data for the printer 18 connected to the self apparatus.

Reference numeral 1A denotes a scanner controller. The scanner controller 1A controls the scanner 1B connected to the self apparatus.

An image reading server apparatus and an image reading client apparatus are connected to the network. In the case where the network apparatus 22 (Fig. 1) functions as an image reading server apparatus, the scanner controller 1A and scanner 1B are necessary.

In the case where the network apparatus 22 (Fig. 1) functions as an image reading client apparatus, the network apparatus 22 (Fig. 1) can use the shared scanner controller 1A and scanner 1B provided for the image reading server apparatus through the self communication controller 4 and communication port 5 as mentioned above.

In the construction of Fig. 2, the scanner controller 1A and scanner 1B can be constructed as

physically separate components or even if the scanner 1B is one component including the scanner controller 1A, a similar function is provided.

5 An external apparatus controller 19 controls the printer controller 17 and scanner controller 1A.

The operating programs stored in the program memory 3 can be also stored in the storage medium such as hard disk 10, floppy disk 9, or the like connected directly to the network apparatus 22 (Fig. 1).

10 The operating programs can be also stored in another network apparatus connected to the network. The operating programs of the embodiment can be supplied to the network apparatus through the storage medium such as floppy disk 9, hard disk 10, or the like
15 or a network.

<First embodiment>

The first embodiment will now be described hereinbelow.

20 Figs. 3A and 3B are flowcharts showing processes of the network apparatus according to the embodiment. The network apparatus (for example, personal computer) 22 to which the peripheral 23 has been connected will be described. First, it is assumed that the PC 22 is in a display state where the peripheral 23 is not
25 displayed in expanded form on the CRT. The case where an expanded display is instructed in this display state will now be described.

First, connection information of all of the shared PCs and peripherals on the network and status information such as processing states or the like of the apparatuses are obtained in step S201. Those
5 information is stored in the PMEM 3 (Fig. 2).

Display positions where the PCs and peripherals are displayed on the CRT 16 (Fig. 2) are calculated on the basis of the obtained information in step S202.

09671161-092000
10 All of the PCs and peripherals are displayed at predetermined positions on the same picture plane on the CRT 16 on the basis of the connection information and status information in step S203.

Fig. 4 shows an example of a screen display. Reference numeral 401 denotes a menu, 402 a tool bar, and 403 a main window for displaying icons indicative
15 of the PCs and peripherals.

Icons 402a to 402g for allowing various functions to be executed are displayed in the tool bar 402. Each function of the icons 402a to 402g can be executed by
20 operating the PC or peripheral.

For example, the icon 402a is an icon to execute the copying function for reading out the image data from the selected image scanner (image reading apparatus) and outputting the image data to the
25 selected printer.

The icon 402b is an icon to execute the facsimile (FAX) function. The icon 402c is an icon to execute

the reading function of the image data. The icon 402d is an icon to execute the function for reading the image data and performing an OCR process. The icon 402e is an icon to execute the function for managing FAX reception data and distribution data. The icon 402f is an icon to execute an updating process of information. The icon 402g is an icon to stop the updating process.

The above status information will now be described. Icons 403a to 403ae are icons showing the PCs and peripherals shared on the network. The icons 403a to 403ae are displayed as icons (display forms) of device kinds in accordance with device kinds such as PC, printer, image scanner, FAX modem, and the like. The icons 403a to 403ae are changed in dependence on a processing state such as "during the processing", "error generation", or the like and displayed.

The icon 403a is an icon showing the self apparatus. The icon 403b is an icon showing a domain in which the self PC is in a logon state. Since the self PC is a special apparatus, it is displayed so as to be distinguished from the other PCs.

The icon 403ad denotes the peripheral in which no driver is installed although it is shared on the network. The icon 403ad is displayed in gray. Since the peripheral in which the driver has been installed is displayed by an icon in a clear color, the presence

or absence of the installed driver can be easily known.
The above information is the status information.

Although the icons 403d, 403e, and the like denote
the peripherals connected to the self PC, a "+" (plus)
5 mark is displayed on the icons 403d, 403e, and the like
in order to show the fact that the peripherals are not
displayed in expanded form on the screen.

As for the icon 403ab, a "-" (minus) mark is
displayed on the icon 403ab in order to show the fact
10 that the peripheral connected to the self PC
(apparatus) has been expanded on the screen.

As for the icons 403c, 403g, and the like, no mark
is displayed on the icons 403c, 403g, and the like in
order to show the fact that no peripheral is connected
15 to the self PC (apparatus).

As mentioned above, the connecting states and
statuses of all of the PCs and peripherals on the
network can be confirmed on the screen. In this
example, although all icons are not displayed due to a
20 restriction of a size of screen, all of the PCs and
peripherals can be confirmed by using the scroll bar
arranged on the side of the screen.

Subsequently, whether a display change has been
instructed or not is discriminated in step S204 in Fig.
25 3A. If there is no instruction for the display change,
the processing routine is finished. If there is the
change instruction, step S205 follows.

00671161:002000

As an operating method of the change instruction, for example, there is a method of instructing the change by clicking the "+" mark displayed on the icon 403f showing the PC by the mouse. By performing such a
5 change instruction, the icons of the peripherals connected to the icon 403f indicative of the PC are displayed. For example, as shown by the icon 403ab, the connected peripheral is displayed in expanded form.

In step S205, whether it is necessary to change
10 (move) the display position of the icon of the designated PC or not is discriminated on the basis of the information of the peripherals connected to the PC to which the display change has been designated and the current display position.

15 If there is no need to change the display positions, step S209 follows. In step S209, the display positions of the peripherals connected to the self apparatus are calculated, obtained, and displayed. Step S212 follows.

20 In step S212, whether it is necessary to move the display positions of the other PCs and the peripherals connected thereto or not is discriminated. If it is necessary to move, step S213 follows and the display positions after the movement are again calculated,
25 obtained, and displayed.

Fig. 5 shows an example of a screen display. For example, when the "+" mark displayed on the icon 403f

showing the PC in Fig. 4 is clicked with the mouse, the icon 403f is displayed in expanded form. When the icon 403f of the PC is displayed in expanded form, the display position of an icon 503f of the PC in Fig. 5 corresponding to the icon 403f is not changed.

The reasons will now be described. In the row of the icon 503f, the icons of the PCs are sequentially arranged and displayed from the left direction for a network line. The peripherals connected to the icon 503f of the PC are two icons 503g and 503h of printers. Therefore, this is because it is possible to display the icons in a manner such that the icons 503g and 503h of the printers are connected to the icon 503f of the PC without changing the display position of the icon 503f of the PC.

If the display positions have to be changed (moved) in step S205 in Fig. 3A, step S206 follows.

In step S206, whether the display row of the designated PC (apparatus) has to be changed or not is discriminated. If the display row of the designated PC (apparatus) is not changed, step S208 follows. The display position of the PC (apparatus) is calculated, obtained, and displayed.

Fig. 6 shows an example of a screen display. For example, when the "+" mark displayed on the icon 403k showing the PC in Fig. 4 is clicked with the mouse, the icon 403k is displayed in expanded form. When the

peripherals connected to the icon 403k of the PC are displayed in expanded form, a display position of an icon 703k of the PC in Fig. 6 corresponding to the icon 403k is moved to the left and the icon is displayed there.

The reasons will now be described. In the row of the icon 703k, the PCs are sequentially arranged and displayed from the right direction for a network line. Three icons 703l, 703m, and 703n of image scanners are connected to the icon 703k of the PC. Therefore, unless the display position of the icon 703k, of the PC is moved to the left, the three icons 703l, 703m, and 703n of image scanners cannot be displayed. As shown in Fig. 6, by moving the icon 703k of the PC to the left and displaying there, the icons 703l, 703m, and 703n of image scanners connected to the icon 703k can be displayed.

If the display row has to be changed (moved) in step S206 in Fig. 3A, step S207 follows.

In step S207, whether the peripherals connected to the PC (apparatus) to which the change has been instructed can be displayed in one row or not is discriminated. If they can be displayed in one row, step S208 follows and the display position of each peripheral is calculated, obtained, and displayed.

Fig. 7 shows an example of a screen display. For example, when the "+" mark displayed on the icon 403v

showing the PC in Fig. 4 is clicked with the mouse, the icon 403v is displayed in expanded form. When the peripherals connected to the icon 403v of the PC are displayed in expanded form, a display row of an icon 5 603v of the PC in Fig. 7 corresponding to the icon 403v is moved downward by one row and the icon is displayed.

The reasons will be described. Two icons 603w and 603x of printers are connected to the icon 603v of the PC. Unless the display position of the icon 603v of 10 the PC is moved, the icons 603w and 603x of printers connected to the icon 603v cannot be displayed. By pushing out the icon 603v of the PC to the lower row and displaying, the icons 603w and 603x of printers connected to the icon 603v can be displayed.

15 If the peripherals cannot be displayed in one row in step S207 in Fig. 3A, step S210 follows. In step S210, display positions of the PCs (apparatuses) to which the change has been instructed are calculated, obtained, and displayed. Further, step S211 follows. 20 In step S211, display positions are calculated, obtained, and displayed so that the peripherals connected to the PCs (apparatuses) to which the change has been instructed are displayed in plural rows.

Fig. 8 shows an example of a screen display. For 25 example, the "+" mark displayed on the icon 403e showing the PC in Fig. 4 is clicked with the mouse, the icon 403e is displayed in expanded form. When the

peripherals connected to the icon 403e of the PC are displayed in expanded form, a display row of an icon 803e of the PC in Fig. 8 corresponding to the icon 403e is moved downward. The peripherals connected to the
5 icon 803e are displayed in two rows.

The reasons will now be described. The peripherals connected to the icon 803e of the PC are eight peripherals of icons 803f, 803g, 803h, 803i, 803j, 803k, and 803l of printers and an icon 803m of an
10 image scanner. A display space of a width of a display window on the screen or more is necessary to display the icons of those eight peripherals, so that all of them cannot be fully displayed in one row. In such a case, by displaying the peripherals in such a manner
15 that the peripherals are folded back and connected, the icons of those eight peripherals can be displayed in the display window of a predetermined width.

Since the display positions of the icons of the PCs to which the change was instructed have been
20 calculated and determined, whether it is necessary to move the display positions regarding the other apparatuses (PCs and/or peripherals) or not is similarly discriminated in step S212. If it is necessary to move the display positions, step S213
25 follows and the display positions of the other apparatuses are again calculated, obtained, and displayed. The processing routine is finished.

Fig. 9 is a flowchart showing a reduced display process according to the embodiment. In this flowchart, a case where a reduced display has been instructed from the display state where the peripherals
5 connected to the PCs were displayed in expanded form will be described.

First, steps S301 to S304 are similar to steps S201 to S204 in Fig. 3A.

Subsequently, in step S304, whether the display
10 change has been instructed or not is discriminated. If the display change is not instructed, the processing routine is finished. If there is the display change instruction, step S305 follows.

In step S305, whether the display positions of the
15 PCs (apparatuses) to which the change has been instructed have to be changed (moved) or not is discriminated. If it is necessary to change them, step S306 follows and the display positions of the PCs (apparatuses) to which the change has been instructed
20 are calculated, obtained, and displayed. Step S307 follows. If there is no need to change them, no process is performed and next step S307 follows.

In step S307, whether it is necessary to change
25 the display positions of the other apparatuses (PCs and/or peripherals) due to the display change of the PCs (apparatuses) to which the change has been instructed or not is discriminated. If it is necessary

to change the display positions, step S308 follows.

The display positions of the apparatuses other than the apparatuses to which the change has been instructed are calculated, obtained, and displayed. After that, the

5 processing routine is finished. If there is no need to change the display positions, step S308 is bypassed and the processing routine is finished.

By executing the processes of the flowchart, for example, the following display change can be performed.

10 For instance, by clicking a "-" mark displayed on the icon 503f of the PC shown in Fig. 5 by the mouse, the icon 403f in Fig. 4 corresponding to the icon 503f in Fig. 5 is displayed in reduced form as shown in Fig. 4. The "+" mark is displayed on the icon 403f by the
15 reduced display and the icons of the peripherals connected to the icon 403f are erased.

Similarly, by clicking a "-" mark displayed on the icon 703k of the PC shown in Fig. 6 by the mouse, the icon 403k in Fig. 4 corresponding to the icon 703k in
20 Fig. 6 is displayed in reduced form as shown in Fig. 4.

Similarly, by clicking a "-" mark displayed on the icon 603v of the PC shown in Fig. 7 by the mouse, the icon 403v in Fig. 4 corresponding to the icon 603v in
Fig. 7 is displayed in reduced form as shown in Fig. 4.

25 Similarly, by clicking a "-" mark displayed on the icon 803e of the PC shown in Fig. 8 by the mouse, the icon 403e in Fig. 4 corresponding to the icon 803e in

Fig. 8 is displayed in reduced form as shown in Fig. 4.

As mentioned above, when the peripherals are connected to the PC, the icon of the PC can be displayed in reduced form or displayed in expanded form. In case of the reduced display, the "+" mark is displayed on the icon of the PC and the icons of the peripherals connected to the PC are not displayed.

When the display change is instructed by clicking the "+" mark on the icon of the PC by the mouse, the icon can be displayed in expanded form. In case of the expanded display, the "-" mark is displayed on the icon of the PC and the icons of the peripherals connected to the PC are displayed in expanded form.

On the other hand, when the display change is instructed by clicking the "-" mark on the icon of the PC by the mouse, the icon can be displayed in reduced form.

Whether it is necessary to change the display position of the icon of the PC to which the change has been instructed in accordance with the number of peripherals connected to the PC to which the change has been instructed or not is discriminated at the time of the expanded display. By changing the display position of the icon, even if the number of peripherals is large, the peripherals can be efficiently displayed at the proper positions.

When the number of peripherals is small, there is

no need to change the display row of the icons of the PCs. However, when the number of peripherals is large, by changing the display positions of the icons of the PCs, for example, downward by one row, a wide display
5 space is assured and a number of peripherals can be displayed.

When the number of peripherals is small, the peripherals are arranged and displayed in one row. When the number of peripherals is large, the
10 peripherals are folded back and arranged and displayed in plural rows. By folding back and displaying the peripherals in the plural rows, a number of peripherals can be displayed.

When the icons are displayed in expanded form,
15 there is a case where the display positions of the PCs and/or peripherals in the display row under the present row have to be moved further downward by such an influence. In this case, the display positions of the PCs and/or peripherals are calculated again and can be
20 efficiently displayed at proper positions.

When the icons are displayed in expanded form, it is possible to construct the apparatus in a manner such that the icons of only the image input apparatuses (image scanners) and image output apparatuses
25 (printers) are displayed in expanded form and the other apparatuses (for example, storing apparatuses and the like) are not displayed in expanded form or the icons

of only the peripherals which have been shared and set for the other terminals on the network are displayed in expanded form.

Further, it is also possible to construct the
5 apparatus in a manner such that the user is allowed to designate an expanded display mode such as mode for expanding only the image scanners, mode for expanding only the printers, or the like and the icons are displayed in expanded form on the basis of the
10 designated mode.

As the number of peripherals which are used for calculation of the display positions in this case, the total number of peripherals which meet the conditions of the expanded display among the connected peripherals
15 is used.

Even when the number of peripherals connected to the PC is large, the icon of the PC can be efficiently displayed in expanded form or displayed in reduced form on the same picture plane. The connecting states of
20 the PCs and peripherals can be easily known.

A status of each apparatus can be easily known by obtaining the status information of each apparatus connected to the network and displaying the icon of each apparatus in accordance with the status
25 information.

<Second embodiment>

The second embodiment will now be described

09671461-092800

hereinbelow.

In the second embodiment, there is shown an example in which in response to the operation for dragging a device icon to a PC icon on a device map display screen, the icons of the devices locally connected to the PC corresponding to the PC icon are displayed in expanded form and the display position of each icon on the device map is calculated again and displayed in accordance with the expanded display.

Fig. 10 is a flowchart showing processes of the network apparatus 22 according to the embodiment. A case where the network apparatus 22 is the PC will be described as an example hereinbelow.

First, in step S1001, the connection information of all of the shared PCs 22 and peripherals 23 on the communication network 21 and the status information such as processing states or the like of those apparatuses are obtained. The information is stored in the PMEM 3 (Fig. 2).

Subsequently, in step S1002, the positions where the PCs and peripherals are displayed on the display screen of the CRT 16 (Fig. 2) are calculated on the basis of the obtained information.

In step S1003, all of the PCs and peripherals are displayed at predetermined positions on the same picture plane of the CRT 16 on the basis of the connection information and the status information.

Fig. 11 shows an example of a display screen. Reference numeral 1101 denotes a menu; 1102 a tool bar; and 1103 a main window for displaying the icons of the PCs and peripherals.

5 Icons 1102a to 1102g for allowing various functions to be executed are displayed on the tool bar 1102. Each function of the icons 1102a to 1102g can be executed by operating the PC or peripheral.

10 For example, the icon 1102a is an icon to execute the copying function for reading image data from the selected image scanner (image reading apparatus) and outputting the image data to the selected printer.

15 The icon 1102b is an icon to execute the FAX function. The icon 1102c is an icon to execute the reading function of the image data. The icon 1102d is an icon to execute the function for reading the image data and performing the OCR process. The icon 1102e is an icon to execute the function for managing FAX reception data and distribution data. The icon 1102f is an icon to execute the updating process of information. The icon 1102g is an icon to stop the updating process.

20 The status information will now be described. Icons 1103a to 1103ag are icons showing PCs, peripherals, and domains which are shared on the network. The icons 1103a to 1103ag are displayed as icons (display forms) of device kinds in accordance

with the device kinds such as PC, printer, image scanner, FAX modem, and the like. The icons 1103a to 1103ag are changed in accordance with a processing state such as "during the processing", "error generation", or the like and displayed.

The icon 1103a is an icon showing the self PC (apparatus). The icon 1103b is an icon showing the domain in which the self PC is in the logon state. Since the self PC is a special apparatus, it is displayed so as to be distinguished from the other PCs.

Although the icon 1103e is shared on the network, it is a peripheral in which no driver is installed, so that the icon 1103e is displayed in gray. Since the peripheral in which the driver has been installed is displayed by an icon in a clear color, whether the driver has been installed or not can be easily known. The above information is the status information.

Although the icons 1103j, 1103k, and the like denote the peripherals connected to the self PC (network apparatus), a "+" (plus) mark is displayed on the icons 1103j, 1103k, and the like in order to show the fact that the peripherals are not displayed in expanded form on the screen. The icons 1103j, 1103k, and the like are displayed in reduced form.

As for the icons 1103c, 1103f, and the like, a "-" (minus) mark is displayed on the icons 1103c, 1103f, and the like in order to show the fact that the

peripherals connected to the self PC (network apparatus) have been expanded on the screen. The icons 1103c, 1103f, and the like are displayed in expanded form.

5 When the peripherals are connected to the self PC, the "+" mark or the "-" mark is displayed on the icon of the self PC. Either the reduced display or the expanded display can be selected every PC.

10 As for the icons 1103s, 1103q, and the like, no mark is displayed on the icons 1103s, 1103q, and the like in order to show the fact that no peripheral is connected to the self PC (apparatus).

15 As mentioned above, the connecting states and statuses of all of the PCs and peripherals on the network can be confirmed on the screen. In this example, although all icons are not displayed due to a restriction of a size of screen, all of the PCs and peripherals can be confirmed by using the scroll bar arranged on the side of the screen.

20 Subsequently, whether the dragging operation has been performed to the peripheral or network apparatus by using, for example, the mouse 13 (Fig. 2) or not is discriminated in step S1004. The dragging operation is an operation which is executed when the operator moves
25 a mouse pointer with the mouse button depressed.

 In the case where the dragging operation is not performed, the processing routine is finished. If the

dragging operation is performed, step S1005 follows.

In step S1005, whether the dropping operation has been performed to the peripheral or network apparatus to which the dragging operation was being performed or not is discriminated. The dropping operation is an operation which is executed when the operator removes the mouse button.

When the dropping operation is performed, step S1006 follows. In step S1006, whether the dropping operation is an effective process or not is discriminated. If it is not effective, the processing routine is finished. If it is effective, step S1007 follows.

In step S1007, the functions corresponding to the dragging operation and the dropping operation are executed. For example, in Fig. 11, if the icon 1103i of the image scanner is subjected to the dragging and dropping operations so as to be moved to the position of the icon 1103d of the printer, the image data is read out from the image scanner shown by the icon 1103i and outputted to the printer shown by the icon 1103d. That is, the copying function from the image scanner to the printer is executed. After that, the processing routine is finished.

If it is determined in step S1005 in Fig. 10 that the dropping operation is not performed after the dragging operation, step S1008 follows. In step S1008,

the present position of the mouse pointer of the mouse 13 is used as a reference and whether the display form of the icon at the present position is changed or not is discriminated. The display form is, for example, 5 the expanded display or reduced display.

As a discriminating method, for example, in Fig. 11, as for the icon 1103f of the PC, the icons 1103g, 1103h, and 1103i of the peripherals connected to the self PC are displayed in expanded form. In the case 10 where the mouse pointer is located at the position of the icon 1103f, since the apparatus is in a state where the dragging operation can be performed to the icons 1103g, 1103h, and 1103i of all of the peripherals connected to the icon 1103f of the PC, there is no need 15 to change the display form of the icon 1103f.

As for the icon 1103j of the PC or the like, although the peripheral is connected to the self PC, the peripheral is not displayed in expanded form but displayed in reduced form. In such a case, the 20 dragging operation cannot be performed to such a peripheral. In this case, to display the icon 1103j in expanded form, it is necessary to change the display form from the reduced form to the expanded form. By displaying the peripherals connected to the icon 1103j 25 of the PC in expanded form, the dragging operation can be performed to the peripherals connected to the icon 1103j of the PC.

If it is determined in step S1008 that there is no need to change the display form, the processing routine is returned to step S1005. If it is determined that it is necessary to change the display form, the processing
5 routine advances to step S1009.

In step S1009, the display positions of the PC (network apparatus) where the mouse pointer is located and the peripherals connected to such a PC are calculated and displayed. Step S1010 follows.

10 In step S1010, whether the display positions of the other PCs (network apparatuses) and/or peripherals are corrected (changed) or not is discriminated. If it is unnecessary to correct, the processing routine is returned to step S1005.

15 Fig. 12 shows an example of a display screen. It shows a case where the dragging operation is performed to the icon 1103i of the image scanner shown in Fig. 11 and the mouse pointer of the mouse 13 is moved to the position of the icon 1103k of the PC. By moving the
20 mouse pointer to such a position, the display form shown in Fig. 11 is changed to the display form shown in Fig. 12. The icon of the image scanner is displayed on the icon 1203k of the PC in Fig. 12 corresponding to the icon 1103k in Fig. 11. The icon 1203k
25 corresponding to the icon 1103k is displayed in expanded form. That is, the icon 1203k of the printer connected to the icon 1203k of the PC is displayed in

expanded form.

If it is determined in step S1010 in Fig. 10 that it is necessary to correct the display positions of the other PCs (network apparatuses) and/or the peripherals, step S1011 follows. In step S1011, the display positions of the other PCs and/or peripherals whose display positions need to be corrected are calculated again and displayed.

Fig. 13 shows an example of a display screen. The above processes will be specifically explained with reference to Fig. 13. In a manner similar to that mentioned above, a case where the mouse pointer of the mouse 13 is moved to the position of the icon 1103ae of the PC by dragging the icon 1103i of the scanner shown in Fig 11 will be explained. In this case, the display form in Fig. 11 is changed to that in Fig. 13.

That is, although the peripherals have been connected to the icon 1103ae of the PC shown in Fig. 11, the icon 1103ae is displayed in reduced form. In Fig. 13, the icon 1303ae of the PC corresponding to the icon 1103ae of the PC in Fig. 11 is displayed in expanded form. That is, the icon 1303af of the FAX apparatus connected to the icon 1303ae of the PC and the icon 1303ag of the printer are displayed in expanded form.

In this instance, to display the icons 1303af and 1303ag of the peripherals connected to the icon 1303ae

of the PC, it is necessary to move the icons 1103ae, 1103af, and 1103ag shown in Fig. 11. That is, the icon 1303ae in Fig. 13 corresponding to the icon 1103ae in Fig. 11 is moved to the left along the network line and
5 displayed. Similarly, the icon 1303ah in Fig. 13 corresponding to the icon 1103af in Fig. 11 is also moved to the left along the network line and displayed. Further, since the icon 1103ag of the domain which was being displayed in Fig. 11 is moved downward of the
10 screen, it is not displayed on the display screen in Fig. 13. After the re-display as mentioned above was performed, the processing routine is returned to step S1005 in Fig. 10.

As mentioned above, a peripheral or PC (network
15 apparatus) on the copy source side can be selected and designated by the dragging operation. When the mouse pointer is moved by the dragging operation, the PC (network apparatus) locating at the position indicated by the mouse pointer is selected and designated. When
20 the peripherals are connected to the selected and designated PC and the PC is displayed in reduced form, it is determined that it is necessary to change the display form of the PC. In this case, the display form of the PC is changed from the reduced display to the
25 expanded display. When the PC is displayed in expanded form, the peripherals connected to the PC are displayed in expanded form. Since the peripherals are

automatically displayed, when the operator executes the dropping operation at the positions of the peripherals, he can select and designate a peripheral or PC on the copy destination side. The copying function from the copy source to the copy destination can be executed by the dragging operation and dropping operation. For example, the image data read by the image scanner on the copy source side can be printed (outputted) to the printer on the copy destination side.

As mentioned above, by automatically displaying the PC selected and designated by the mouse pointer in expanded form, the peripherals connected to the PC can be easily and efficiently selected and designated by the dropping operation.

When it is necessary to change the display form, the display positions are calculated again and displayed. If it is necessary to change the display positions of the PC and peripherals on the network other than the PC and peripherals in which the display form has been changed, those display positions are again calculated and displayed. Thus, the connecting states of the PCs and peripherals on the network can be efficiently displayed.

<Third embodiment>

The third embodiment will be described hereinbelow.

The above second embodiment has been described

with respect to an example in which by dragging the icon of the device on the device map display screen to the PC icon, all of the devices connected to the PC are displayed in expanded form.

5 In the third embodiment, only the peripherals which can operate in an interlocking relational manner with the dragged device among the devices connected to the PC are displayed in expanded form.

10 For example, when the icon of the scanner is dragged, by displaying only the devices (printer, multifunction apparatus) having the printing function in expanded form, the display space on the device map display screen which is necessary for expanded display is minimized. Thus, such a situation that the display
15 of the device map is remarkably changed due to the expanded display and the user cannot temporarily discriminate the connecting state of the network apparatus can be prevented.

20 It is sufficient that a combination of interlocking states of the devices is preliminarily registered by the user. As another combination, a printer whose resolution is preferably matched with that of the dragged scanner can be also displayed in expanded form. A printer corresponding to the original
25 reading size of the dragged scanner can be also displayed in expanded form.

Fig. 14 is a flowchart showing the third

embodiment of the invention.

First, in step S1401, the connection information of all of the shared PCs and devices on the network and the using states and status information of the devices
5 are obtained. Those information is stored.

Fig. 15 shows an example of a data table in which the information obtained in step S1401, namely, the information of each PC and the devices locally connected to the PC on the network has been stored. In
10 the example of Fig. 15, information 1503 regarding PCs (1501, 1502) on the network and information 1503 to 1509 of the devices locally connected to the PC have been stored every PC.

The information of the devices locally connected to the PCs can be obtained by those information. For
15 example, the number of devices connected to the PC can be discriminated. Further, among those devices, the number of devices having the printer function connected to the PC, the number of devices having the scanner
20 function connected to the PC, and the number of devices having the FAX function connected to the PC can be discriminated, respectively.

The positions where the PCs and the devices locally connected to the PC are displayed are
25 calculated on the basis of the obtained information in step S1402. In step S1403, a device map display screen similar to that in each of the first and second

embodiments is displayed on the basis of those information.

Whether the dragging operation of the device icon has been instructed by using the mouse pointer 13 or the like or not is discriminated in step S1404. If it is not instructed, the processing routine is finished. If it is instructed, step S1405 follows.

In step S1405, whether the dropping operation of the dragged device icon has been performed or not is discriminated. If the dropping operation is performed, step S1406 follows.

In step S1406, whether the dropping operation is an effective process or not is discriminated. If it is not effective, the processing routine is finished. If it is effective, step S1407 follows and the corresponding function is executed.

The discrimination about the effective process in step S1406 is made on the basis of a data table shown in Fig. 16.

Fig. 16 shows an example of a data table in which combinations of effective functions among the functions possessed by the devices have been stored.

For example, reference numeral 1601 denotes the fact that the scanner function and the printer function are an effective combination and, in the case where the scanner icon is dragged and dropped to the printer icon, the copying function for reading out the image

data from the scanner corresponding to the icon and outputting it to the printer corresponding to the icon is executed.

Reference numeral 1602 denotes the fact that the
5 scanner function and the FAX function are an effective combination and in the case where the scanner icon is dragged and dropped to the printer icon, the FAX function for reading out the image data from the scanner corresponding to the icon and outputting it to
10 the printer corresponding to the icon is executed.

When the dropping operation is not performed in step S1405, step S1408 follows. In step S1408, whether the icon designated from the mouse pointer 13 by the dragging operation is the PC icon which is not yet
15 displayed in expanded form and the device has been connected to the PC corresponding to this icon or not is discriminated. If YES, step S1410 follows.

In step S1409, whether the display form is changed or not is further discriminated. That is, whether the
20 icon designated from the mouse pointer 13 by the dragging operation is the PC icon which has already been displayed in expanded form and the device icon which has been displayed in expanded form should be changed on the basis of the combination of the
25 effective functions shown in Fig. 16 or not is discriminated. For example, if the scanner icon has been dragged to the PC icon, it is determined that only

the device icons having the effective functions for the scanner function among the device icons which have already been displayed in expanded form to such a PC icon should be displayed in expanded form.

5 As a discriminating method, whether the device is a device which can execute the effective functions for the dragged icon or not is discriminated on the basis of the data tables shown in Figs. 15 and 16.

10 In step S1410, the display positions of the PC and devices connected thereto are calculated and displayed. In this instance, the display positions are calculated on the basis of the number of devices having the effective functions for the device functions of the dragged icon.

15 Step S1411 follows and whether the display positions of the other icons are moved or not is discriminated. If there is no need to move, the processing routine is returned to step S1405. If it is necessary to move the display positions of the other
20 icons in step S1411, step S1412 follows. The display positions of the icons other than the designated icon are again calculated and displayed. After the display positions were again displayed as mentioned above, the processing routine is returned to step S1405.

25 Although the first to third embodiments have been described above, the network apparatus which is connected to the network is not limited to the PC but

can be set to another computer such as a workstation or the like or can be also set to a printer, a facsimile, or a multi function device so long as it is an apparatus which can locally connect the devices.

5 To realize the functions of the embodiments mentioned above, program codes of software for realizing the functions of the embodiments are supplied to each network apparatus and the apparatus can be made operative in accordance with a program stored in a
10 computer (a CPU or an MPU) of the network apparatus.

 In this case, the program codes themselves of the software realize the functions of the embodiments mentioned above. The program codes themselves and means for supplying the program codes to the computer,
15 for example, a recording medium in which the program codes have been stored construct the invention. As a recording medium for storing the program codes, for example, it is possible to use a floppy disk, a hard disk, an optical disk, a magnetooptic disk, a CD-ROM, a
20 magnetic tape, a non-volatile memory card, an ROM, or the like.

 The program codes are incorporated to the embodiments of the invention in not only the case where the functions of the embodiments mentioned above are
25 realized by executing the supplied program codes by a computer but also the case where the program codes are executed in cooperation with the OS (Operating System),

another application software, or the like which is operating in the computer and the functions of the embodiments mentioned above are realized.

Further, the invention also incorporates the case
5 where the supplied program codes are stored in a memory equipped for a function expanding board of a computer or a function expanding unit connected to the computer and, thereafter, a CPU or the like equipped for the function expanding board or function expanding unit
10 executes a part or all of the actual processes on the basis of instructions of the program codes, and the functions of the embodiments mentioned above are realized by those processes.

The above embodiments have been merely shown as
15 examples of embodying the invention and the technical scope of the invention should not be limitedly interpreted by them. That is, many modifications and variations of the invention are possible without departing from the spirit of the invention or the main
20 features thereof.

WHAT IS CLAIMED IS:

1. An information processing apparatus which can communicate through a network with each of a plurality of information processing apparatuses connected to said network, comprising:

display means for displaying an icon indicative of each of said plurality of information processing apparatuses onto a virtual system display screen;

said virtual system display screen graphically displaying connecting states of said plurality of information processing apparatuses and peripherals locally connected to each of said information processing apparatuses;

obtaining means for obtaining information of the peripherals locally connected to said information processing apparatus from each of said plurality of information processing apparatuses;

first control means for displaying icons indicative of the peripherals locally connected to said information processing apparatus corresponding to the icon as a target of a user action in response to said user action for the icon of the information processing apparatus on said virtual system display screen on the basis of the information obtained by said obtaining means; and

second control means for calculating display positions of the icons which have already been

displayed on said virtual system display screen on the basis of a display space of the icon of the peripheral which is newly displayed on said virtual system display screen by said first control means.

5

2. An apparatus according to claim 1, wherein said user action includes a first user action for selecting the icon of the information processing apparatus on said virtual system display screen by a pointing device.

10

3. An apparatus according to claim 1, wherein said user action includes a second user action for selecting the icon of the information processing apparatus on said virtual system display screen by a pointing device and selecting the icon of the peripheral locally connected to said information processing apparatus different from the information processing apparatus corresponding to said icon.

15

20

4. An apparatus according to claim 3, wherein said first control means further comprises discriminating means for discriminating whether the icon of the peripheral locally connected to said information processing apparatus selected by said second user action is displayed on said virtual system display screen or not on the basis of attributes of the

25

peripheral corresponding to the icon selected by said second user action,

and only the icon of the peripheral in which a discrimination result by said discriminating means
5 indicates an affirmative decision is displayed.

5. An apparatus according to claim 4, wherein said discriminating means outputs an affirmative decision with respect to the peripheral which can
10 operate in an interlocking relational manner with the peripheral corresponding to the icon selected by said second user action.

6. An apparatus according to claim 5, wherein said discriminating means executes the discrimination
15 on the basis of a reference such that the peripheral having an image input function and the peripheral having an image transmitting function can operate in an interlocking relational manner.

20

7. An apparatus according to claim 5, wherein said discriminating means executes the discrimination on the basis of a reference such that the peripheral having an image input function and the peripheral
25 having an image printing function can operate in an interlocking relational manner.

8. A data processing method in an information processing apparatus which can communicate through a network with each of a plurality of information processing apparatuses connected to said network,
5 comprising:

a display step of displaying an icon indicative of each of said plurality of information processing apparatuses onto a virtual system display screen;

10 said virtual system display screen graphically displaying connecting states of said plurality of information processing apparatuses and peripherals locally connected to each of said information processing apparatuses;

15 an obtaining step of obtaining information of the peripherals locally connected to said information processing apparatus from each of said plurality of information processing apparatuses;

20 a first control step of displaying icons indicative of the peripherals locally connected to said information processing apparatus corresponding to the icon as a target of a user action in response to said user action for the icon of the information processing apparatus on said virtual system display screen on the basis of the information obtained by said obtaining
25 step; and

a second control step of calculating display positions of the icons which have already been

displayed on said virtual system display screen on the basis of a display space of the icon of the peripheral which is newly displayed on said virtual system display screen by said first control step.

5

9. A method according to claim 8, wherein said user action includes a first user action for selecting the icon of the information processing apparatus on said virtual system display screen by a pointing device.

10

10. A method according to claim 8, wherein said user action includes a second user action for selecting the icon of the information processing apparatus on said virtual system display screen by a pointing device and selecting the icon of the peripheral locally connected to said information processing apparatus different from the information processing apparatus corresponding to said icon.

15

20

11. A method according to claim 10, wherein said first control step further comprises a discriminating step of discriminating whether the icon of the peripheral locally connected to said information processing apparatus selected by said second user action is displayed on said virtual system display screen or not on the basis of attributes of the

25

peripheral corresponding to the icon selected by said second user action,

and only the icon of the peripheral in which a discrimination result by said discriminating step
5 indicates an affirmative decision is displayed.

12. A method according to claim 11, wherein in said discriminating step, an affirmative decision is outputted with respect to the peripheral which can
10 operate in an interlocking relational manner with the peripheral corresponding to the icon selected by said second user action.

13. A method according to claim 12, wherein in
15 said discriminating step, the discrimination is executed on the basis of a reference such that the peripheral having an image input function and the peripheral having an image transmitting function can operate in an interlocking relational manner.

20

14. A method according to claim 12, wherein in said discriminating step, the discrimination is executed on the basis of a reference such that the peripheral having an image input function and the
25 peripheral having an image printing function can operate in an interlocking relational manner.

15. A computer-readable memory which stores a computer program which is executed by a computer of an information processing apparatus which can communicate through a network with each of a plurality of

5 information processing apparatuses connected to said network, wherein said computer program comprises:

a display step of displaying an icon indicative of each of said plurality of information processing apparatuses onto a virtual system display screen;

10 said virtual system display screen graphically displaying connecting states of said plurality of information processing apparatuses and peripherals locally connected to each of said information processing apparatuses;

15 an obtaining step of obtaining information of the peripherals locally connected to said information processing apparatus from each of said plurality of information processing apparatuses;

20 a first control step of displaying icons indicative of the peripherals locally connected to said information processing apparatus corresponding to the icon as a target of a user action in response to said user action for the icon of the information processing apparatus on said virtual system display screen on the basis of the information obtained by said obtaining
25 step; and

a second control step of calculating display

positions of the icons which have already been
displayed on said virtual system display screen on the
basis of a display space of the icon of the peripheral
which is newly displayed on said virtual system display
5 screen by said first control step.

16. A memory according to claim 15, wherein said
user action includes a first user action for selecting
the icon of the information processing apparatus on
10 said virtual system display screen by a pointing
device.

17. A memory according to claim 15, wherein said
user action includes a second user action for selecting
15 the icon of the information processing apparatus on
said virtual system display screen by a pointing device
and selecting the icon of the peripheral locally
connected to said information processing apparatus
different from the information processing apparatus
20 corresponding to said icon.

18. A memory according to claim 17, wherein said
first control step further comprises a discriminating
step of discriminating whether the icon of the
25 peripheral locally connected to said information
processing apparatus selected by said second user
action is displayed on said virtual system display

screen or not on the basis of attributes of the peripheral corresponding to the icon selected by said second user action,

and only the icon of the peripheral in which a
5 discrimination result by said discriminating step indicates an affirmative decision is displayed.

19. A memory according to claim 18, wherein in
said discriminating step, an affirmative decision is
10 outputted with respect to the peripheral which can operate in an interlocking relational manner with the peripheral corresponding to the icon selected by said second user action.

20. A memory according to claim 19, wherein in
said discriminating step, the discrimination is
executed on the basis of a reference such that the
peripheral having an image input function and the
peripheral having an image transmitting function can
15 operate in an interlocking relational manner.

21. A memory according to claim 19, wherein in
said discriminating step, the discrimination is
executed on the basis of a reference such that the
25 peripheral having an image input function and the peripheral having an image printing function can operate in an interlocking relational manner.

00671131-002000

FIG. 1

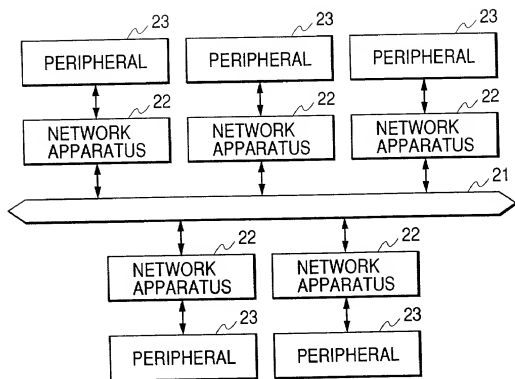


FIG. 2

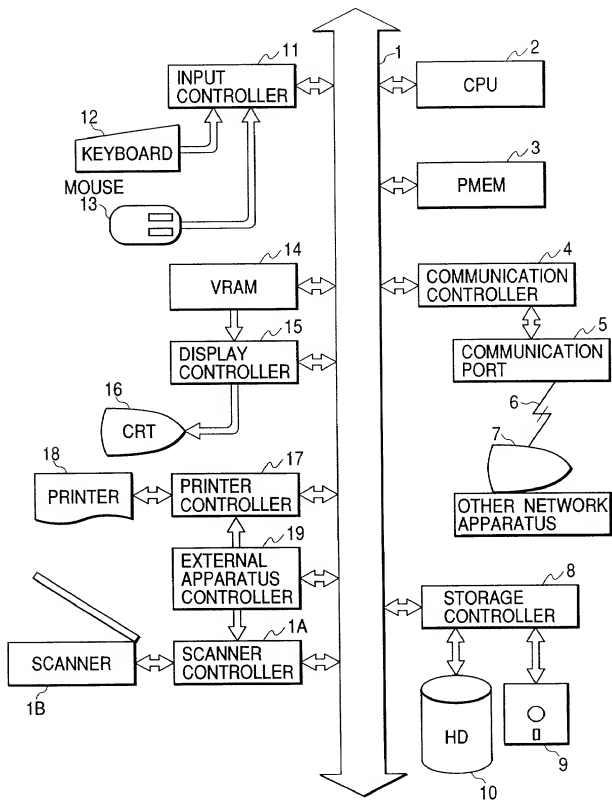


FIG. 3




FIG. 3A

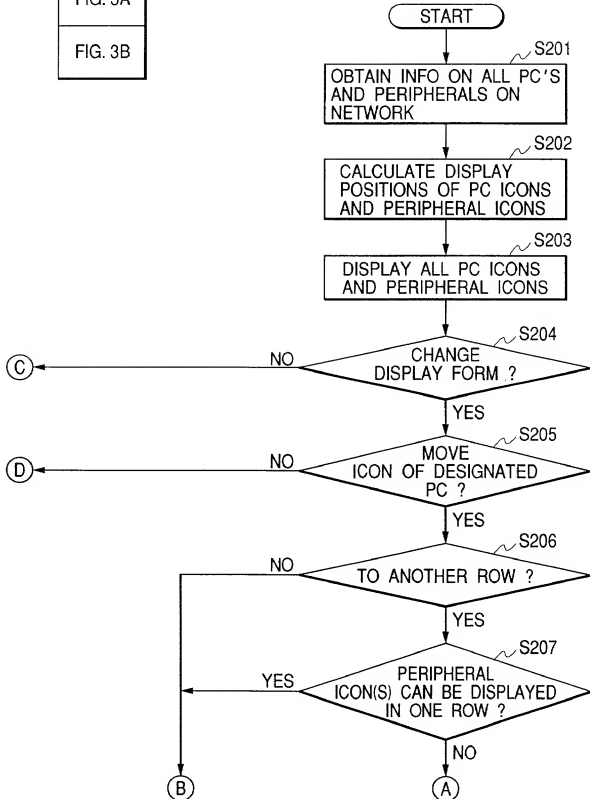


FIG. 3B

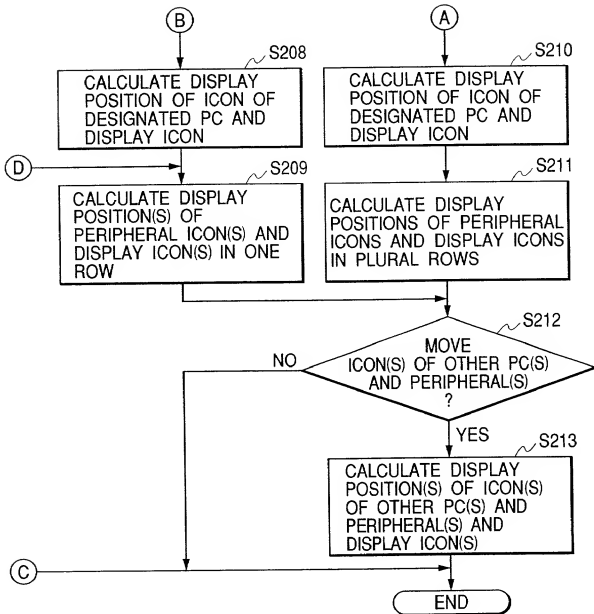


FIG. 4

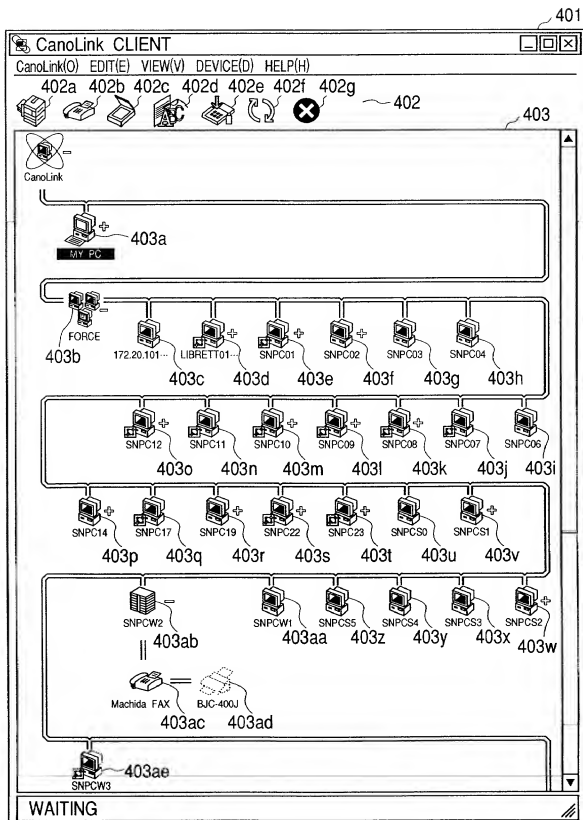


FIG. 5

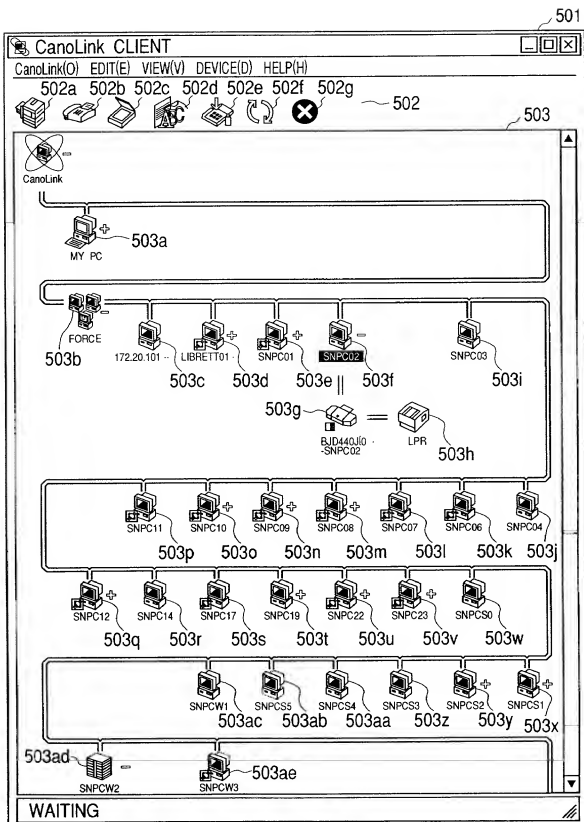


FIG. 6

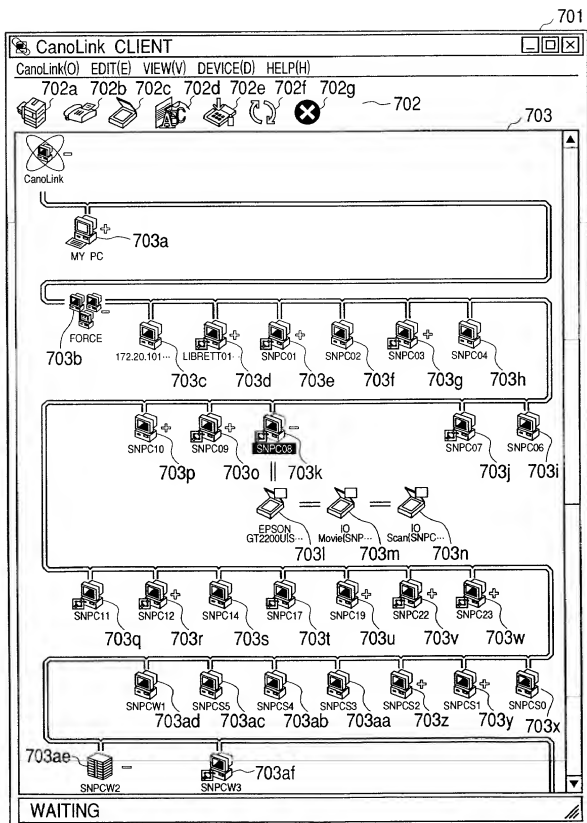


FIG. 7

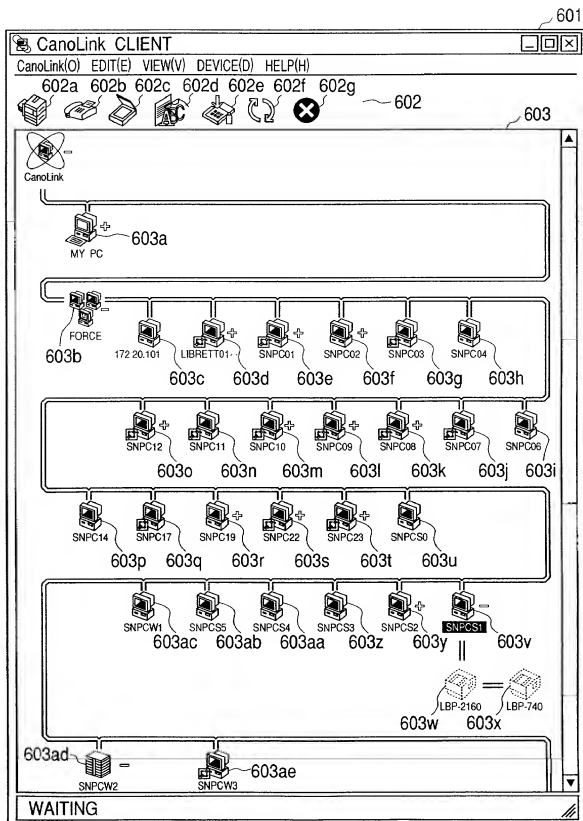


FIG. 8

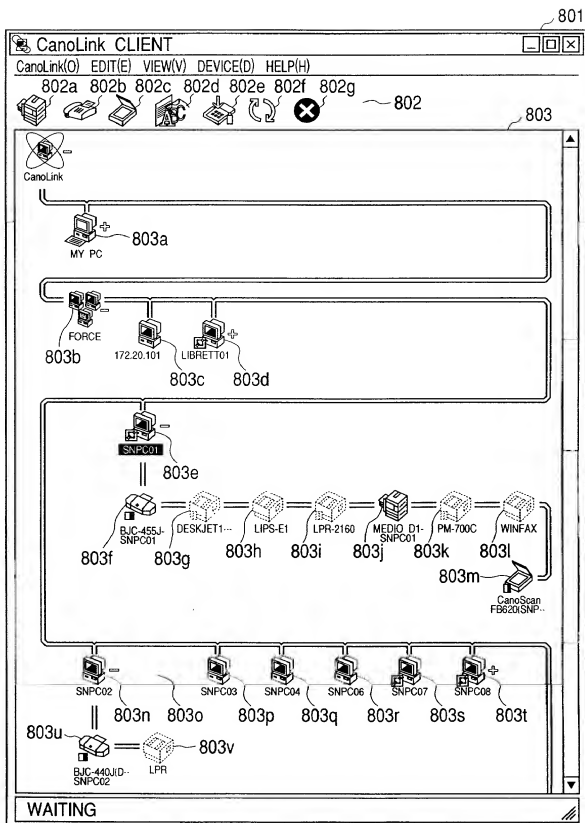


FIG. 9

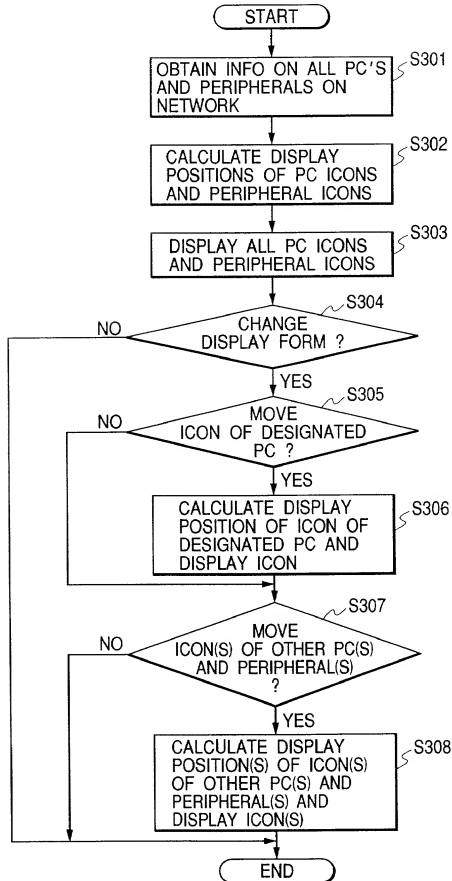


FIG. 10

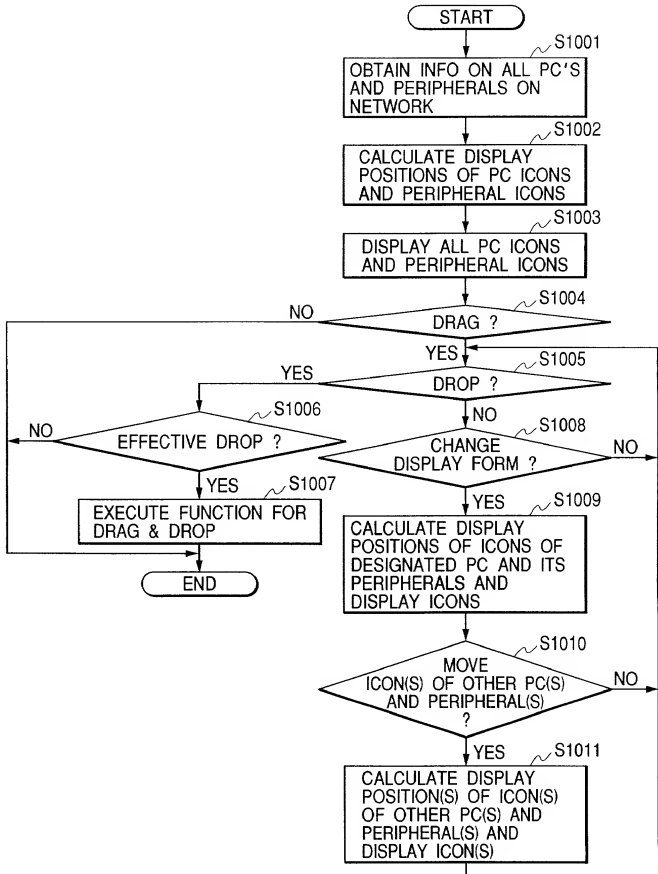


FIG. 11

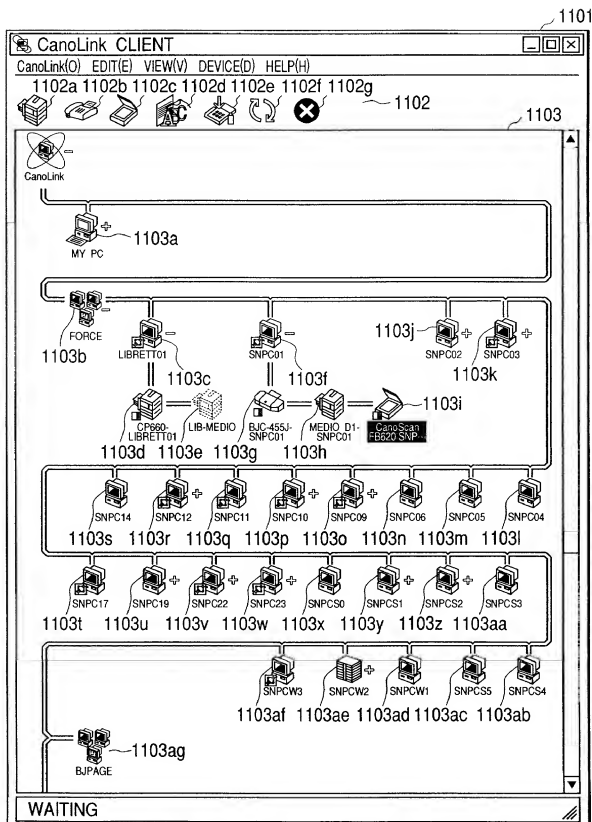


FIG. 12

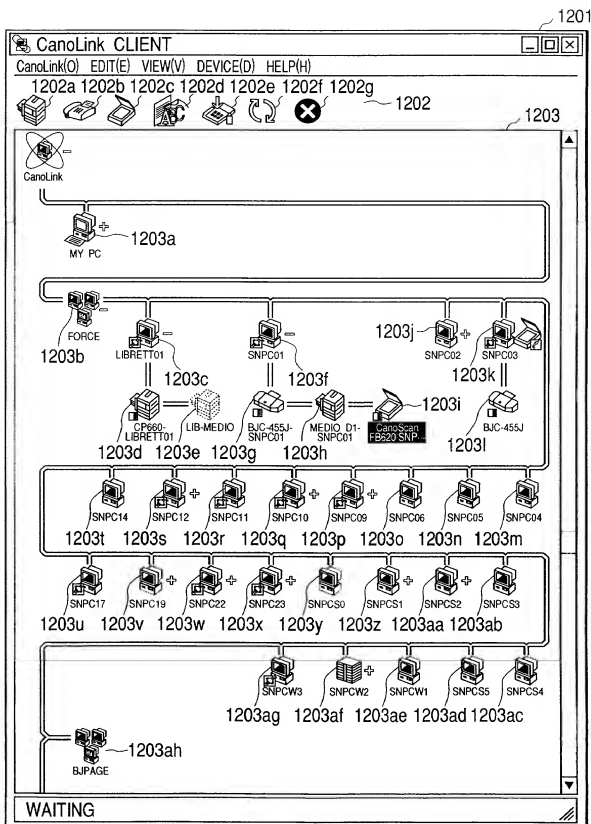


FIG. 13

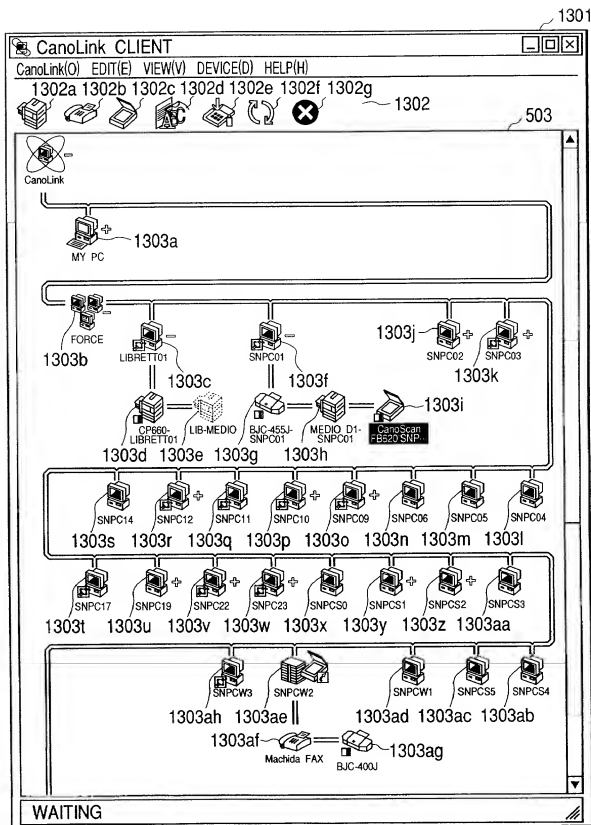


FIG. 14

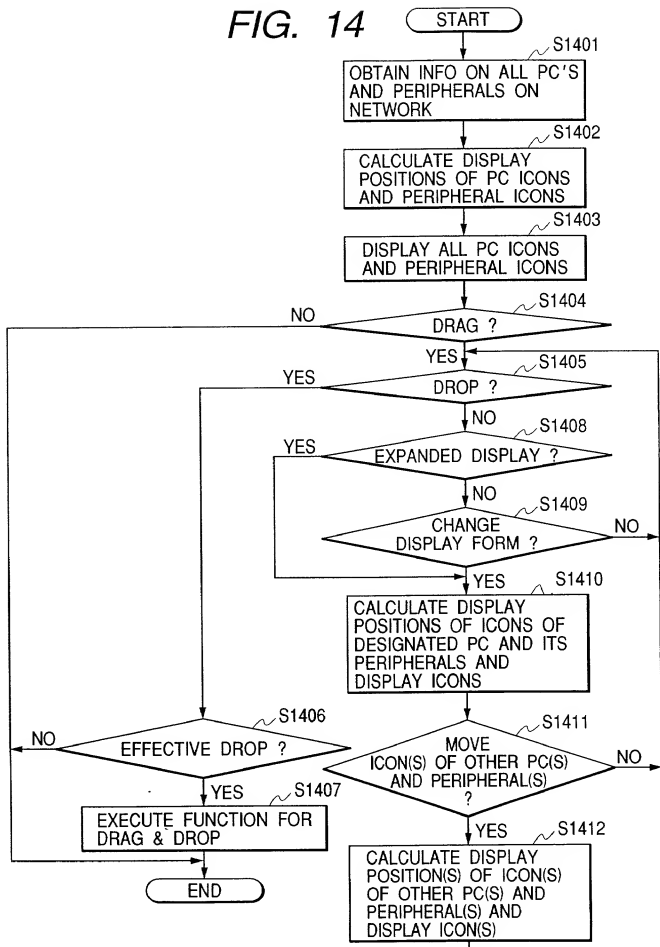


FIG. 15

HEADER INFO	VERSION INFO	
	NO. OF INDEX TABLES : N	
INDEX TABLE	INDEX [0]	DATA INFO OFFSET
		DATA OFFSET
		DATA SIZE
		FLAG
		⋮
	INDEX [N-1]	DATA OFFSET
		DATA SIZE
		FLAG
		⋮
		⋮
1501	1503	HEADER INFO
		PC NAME
		LOGON USER
		LICENSE INFO
		OS INFO
		NO. OF PRINTER INFO : P
	1504	NO. OF SCANNER INFO : S
		NO. OF FAX INFO : F
		PRINTER NAME
		DRIVER NAME
		PORT INFO
		ATTRIBUTE INFO
		⋮
	1505	PRINTER NAME
		DRIVER NAME
		PORT INFO
		ATTRIBUTE INFO
	1506	SCANNER NAME
		DRIVER NAME
		ATTRIBUTE INFO
		⋮
	1507	SCANNER NAME
		DRIVER NAME
		ATTRIBUTE INFO
	1508	FAX NAME
		DRIVER NAME
		ATTRIBUTE INFO
		⋮
	1509	FAX NAME
		DRIVER NAME
		ATTRIBUTE INFO
		⋮
1502	PC INFO [N-1]	HEADER INFO
		PRINTER INFO
		SCANNER INFO
		FAX INFO

FIG. 16

	HEADER INFO	VERSION INFO	
		NO. OF FUNCTION INFO : N	
		DATA INFO OFFSET	
1601	FUNCTION [0]	FUNCTION	COPY
		INPUT DEVICE	SCANNER
		OUTPUT DEVICE	PRINTER
1602	FUNCTION [1]	FUNCTION	FAX
		INPUT DEVICE	SCANNER
		OUTPUT DEVICE	FAX
	FUNCTION [N-1]	FUNCTION	FAX
		INPUT DEVICE	SCANNER
		OUTPUT DEVICE	FAX